

HOBD482D2

Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	83 cm
Power supply	Electric
Type	Induction with integrated hood
Extraction	Extraction
Electronic control	Yes
EAN code	8017709341879
Energy efficiency class (EEC)	A+



Aesthetics



Aesthetic

Colour

Finishing

Material

Glass type

Glass edge

Pan stands

Type of control setting

Slider

LED colours

Control knob position

Logo

Serigraphy colour

Universale

Black

Glass

Glass

Ceramic

Straight edge

Stainless steel

EVO Slider

Yes

Red

Front

Silk screen

Grey

Program / Functions



No. of induction cook zones

4

Time-setting options

Spegnimento automatico

No. of cooking zones with booster

4

No. of Flexible zones

2

Main on/off switch

Yes

Power levels

9

Total no. of cook zones

4

Options



Multizone Option	Yes	Residual time indicator	Yes
Flexible Zone Type	MultiZone	Limited Power	Si Advance
Worktop Cut-Out	490x750 mm	Consumption Mode	
Keep warm automatic function	Yes	Limited Power	2800, 3500, 4500, 7400 W
End cooking timer	4	Consumption Mode in W	
Pause option	Yes	Showroom Demo Option	Yes
Minute minder	1	Control Lock / Child Safety	Yes
End of cooking alarm	Yes	Cleaning option	Yes
		Quick start	Yes
		Rapid level selection	Yes

Technical Features



Front-left - Induction - Multizone - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm

Rear-left - Induction - Multizone - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm

Rear-right - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm

Front-right - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm

Multizone left - Booster 3.70 kW - 39.0x21.0 cm

Multizone right - Booster 3.70 kW - 39.0x21.0 cm

Automatic setting according to pan dimension	Yes	Automatic switch off when overflow	Yes
pan detection	Yes, min. 9 cm	Residual heat indicator	Yes
Permanent Automatic Pot Detection with indication of the relative control	Yes	Protection against accidental start up	Yes

Accessories included

Other accessories	Filtering kit and charcoal filter regenerable included
-------------------	--

Electrical Connection

Electrical connection rating (W)	7620 W	Frequency (Hz)	50/60 Hz
Current	33 A	Power supply cable length	120 cm
Voltage (V)	220-240 V	Terminal box	6 poles
Voltage 2 (V)	380-415 V	Plug	Not present
Type of electric cable supplied	Yes, Single and Double phase		

Controls (hood)

Hood control setting	Touch Capacitive	Display	Yes
Led color	Rosso		

Programs / Functions (hood)

Delay function	Yes	Hood time setting	Delay
No. of speeds	8	Other options	Kit for Recirculation and Extraction included
Intensive speed	2	Automatic connection between integrated hood and hob	Yes

Technical Features (Hood)

Free outlet maximum capacity	650 m ³ /h	Anti-grease filters	Inox
Motor power	220 W	Charcoal filters included	YES, regenerable
No. of filters	1	Filter replacement indicator	Yes

Performance / Energy Label (hood)

Fluid Dynamic Efficiency (FDE)	32.10	Airbourne acoustical A-weighted sound Power	49 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Emission at minimum speed (SPEmin)	
Lighting Efficiency (LE)	0.0 lux/W	Airborne acoustical A-weighted sound Power	68 dBA
Lighting Efficiency Class (LEC)	NA	Emission at maximum speed (SPEmax)	
Grease Filtering Efficiency (GFE)	85.1 %	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	73 dBA
Grease Filtering Efficiency Class (GFEC)	B	Time increase factor (F)	0.8
Air flow at minimum speed (Qmin)	230 m ³ /h	Energy Efficiency Index	44.2
Air flow at maximum speed (Qmax)	500 m ³ /h	Measured air flow rate at best efficiency point (Qbep)	328 m ³ /h
Air flow at boost speed (Qboost)	630 m ³ /h	Measured air pressure at best efficiency point (Pbep)	502 Pa
		Measured electric power input at best efficiency point (Wbep)	139 W
		Sound power level at highest setting (Lwa)	68 dBA

Speed 1

Extraction rate IEC 61591	230 m ³ /h
Noise level IEC 60704-2-13	49 dBA
Pressure	280 Pa
Power	40 W

Speed 2

Extraction rate IEC 61591	270 m ³ /h
Noise level IEC 60704-2-13	51 dBA
Pressure	400 Pa
Power	70 W

Speed 3

Extraction rate IEC 61591	340 m ³ /h
Noise level IEC 60704-2-13	55 dBA
Pressure	400 Pa
Power	70 W

Speed 4

Extraction rate IEC 61591	370 m ³ /h
Noise level IEC 60704-2-13	60 dBA
Pressure	450 Pa
Power	90 W

Speed 5

Extraction rate IEC 61591	400 m ³ /h
Noise level IEC 60704-2-13	62 dBA
Pressure	500 Pa
Power	100 W

Speed 6

Extraction rate IEC 61591	435 m ³ /h
Noise level IEC 60704-2-13	63 dBA
Pressure	550 Pa
Power	120 W

Speed 7

Extraction rate IEC 61591	460 m ³ /h
Noise level IEC 60704-2-13	65 dBA
Pressure	600 Pa
Power	150 W

Speed 8


Extraction rate IEC 61591	500 m ³ /h
Noise level IEC 60704-2-13	68 dBA
Pressure	620 Pa
Power	170 W

Intensive speed

Extraction rate (IEC 61591)	540 m ³ /h
Noise level IEC 60704-2-13	70 dBA
Pressure	625 Pa
Power	180 W

Intensive Speed 2

Extraction rate IEC 61591	630 m ³ /h
Noise level IEC 60704-2-13	73 dBA
Pressure	630 Pa
Power	220 W

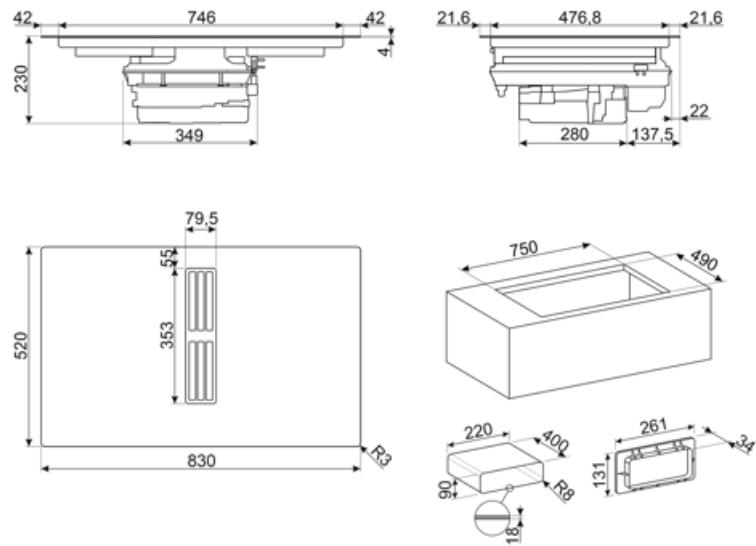

Compatible Accessories

CON60H




Flat duct connector for tubes 220*60 mm. It help to connect more tubes of the kit KITEHOBD4




CON90H

Connector for rectangular tubes high 90 mm. Size external 227*94*63 mm, internal 223*90*63 mm

FLTHOBD2



n.2 high-performance carbon filters regenerable up to 8 times, washing it in the dishwasher and drying it at max 70° in the oven for max 120 minutes



FLTSTDHOBD2

Anti Odour Filter not regenerable as spare part, suitable for recirculation mode.

GRI60H



Rectangular Louvred grille, external size 246*80 mm and internal 226*60*50 mm



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.

GRIX6H



Stainless steel ventilation grille, size 426*60 mm.



KITDT50X10

tape for installation kit of HOBD*2. 10 m lenght. 50 mm width.

KITEHOBD10



Ducted kit for HOBD*2 with tubes and curve high 10 mm.



KITEHOBD4

Filtering kit (lateral outlet) optional for Hobd: tube 1,5 mt and curve, high 60 mm

KITFIT15




horizontal 15° pipe bend, with moulded socket on one side serves as a connecting element to optimally adapt the course of a ventilation system to the structural conditions on site



KITFLEXP

Flexible pipe. Extention range between 205 - 550 mm.

KITRDEF



90° deflector compatible with rectangular pipes as well as with round pipes of series with a diameter of 150 mm.



KITREBFLOW

Rectangular grid used in ventilation system, 290 x 160 mm. Backdraft Damper for regulating the air flow from the kitchen. Compatible for HOBD*2 models.

KITRHOBD6



Mounting kit for recirculating installation: pipes and curves to be mounted in a plinth of minimum 6cm height. Available for HOBD*2 series.

KITRRFIT

Connection kit from round to rectangular, for wall ducting system. Round pipe with a diameter of 150 mm

KITSEBL

Squared grid used in ventilation system with backdraft Damper for regulating the air flow from the kitchen. Compatible for HOBD*2 models.

KRP500

Round tube Ø 150 mm, 50 cm long.

**TPK**

Stainless steel grill plate to cook Teppanyaki dishes

**KRP1000**

Round tube Ø 150 mm, 1m long.

**RED60H**

Reducer from 90 to 60 mm suitable for rectangular tube of 220 mm. Size: 220x90x92 mm

TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.

Symbols glossary

	Permanent auto pot detection		Power booster: option allows the zone to work at full power when very intense cooking is necessary.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		Evolution Slider totally Back-lighted ghost effect
	The slider control panel allows you to adjust the power simply by passing your finger across the touch device.		This function allows you to keep cooked food warm without burner it
	Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility		Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.
	Min diameter pot detection of 9 cm		All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.
	Possibility to set the maximum power absorption of the hob		Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).
	Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.		Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.
	Time elapsed: shows how long the cooking zone has been in use.		Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.